



**ULMATEC
PYRO**

PYRO EXHAUST ECONOMIZER

Transfers exhaust thermal energy to heating of water.

FEATURES

- Automatic control
- Built-in bypass
- Integrated soot cleaning
- Simplicity in design
- Insulated
- Minimized moving parts
- Low back-pressure
- Interface with Ulmatec WERS


BENEFITS

- Re-use of heat from exhaust
- Free energy with minimal investments
- High efficiency
- Reduced emissions by fuel savings
- Easy to clean
- Easy to install
- More space efficient
- Low life cycle cost





**ULMATEC
PYRO**

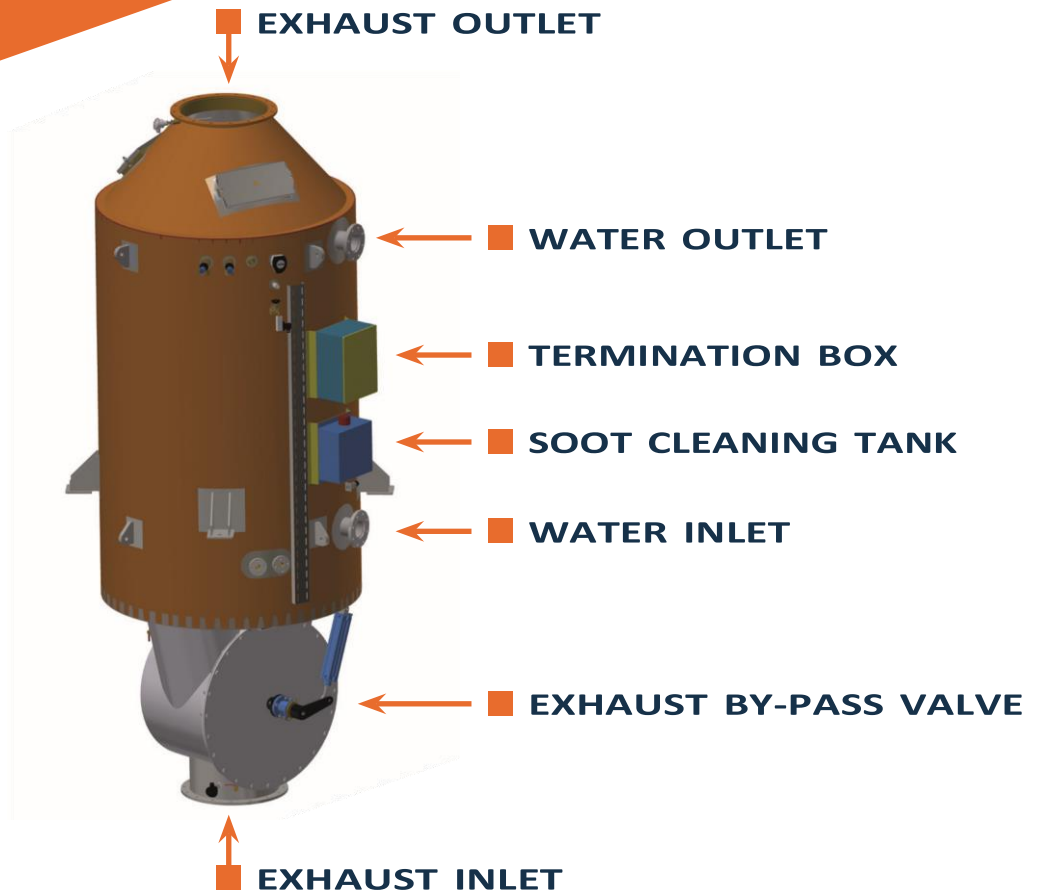

Exhaust Gas Economizer	
Design pressure [bar]	6
Working temperature [°C]	95*
Wide standard size range up to DN1200	
Adjustable up to 95°C. Working temperature from 95-120°C upon request	
Size above DN1200 upon request	

ULMATEC PYRO AS
Hamnsundvegen 370
6280 SØVIK, NORWAY

Phone: +47 70 20 98 70
Fax: +47 70 20 98 90
Email: pyro@ulmatec.no

www.pyro.no